


350, 360 and 371 Fixed Vertical Carrier-Fittings

WADE

No-Hub fitting illustrated. 350 and 360 also available in SV gasket connection.

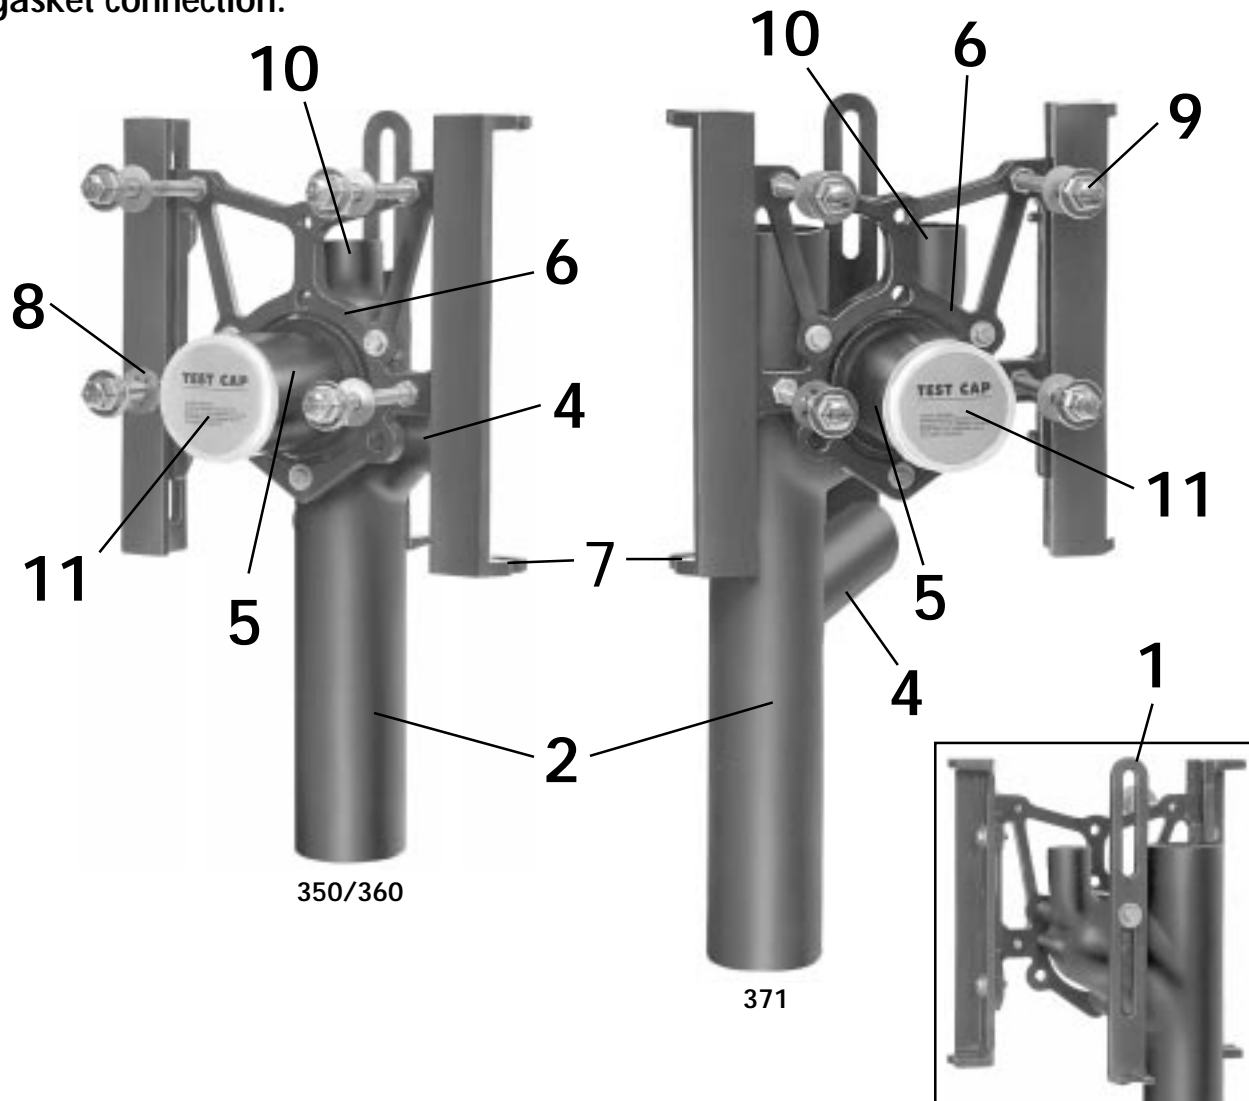

1. Anchor-Foot - Eliminates carrier-fitting rock in dry wall construction; requires fewer securing bolts for installation.
2. Intermediate length body - installs through 9" slab
3. NO-HUB or SV gasket connections.
4. Optional 2" inlets. Available opposite or on same side as closet opening on 350 and 360 series. 371 series with 90° inlet opposite vent and 45° Wye inlet under vent.
5. Heavy-duty plastic coupling (11" standard, longer couplings available with rod support feet).
6. Close-coupled fixed faceplate requires minimum chase space.
7. Adjustable feet - supports faceplate on two bearing surfaces for the entire height of the faceplate; anchor slots on the side for one-bolt anchoring. Permits flush installation behind wall.
8. Bowl-saver nut - simplifies fixture setting and assures rigid connection without breaking the fixture.
9. One piece chrome-plated washer/nuts.
10. Vent Available 2" or 4" on 350. 371NH offset vertical design for multi-floor construction with 4" waste & 2" vent.
11. Integral Test Cap.