

Wall Supported Lavatory Carriers



572 Wall lavatory carrier with adjustable brackets, for concealed or exposed arms.





Concealed Arms



Exposed Arms

Letter Dimensions Vary According to Fixture Used.

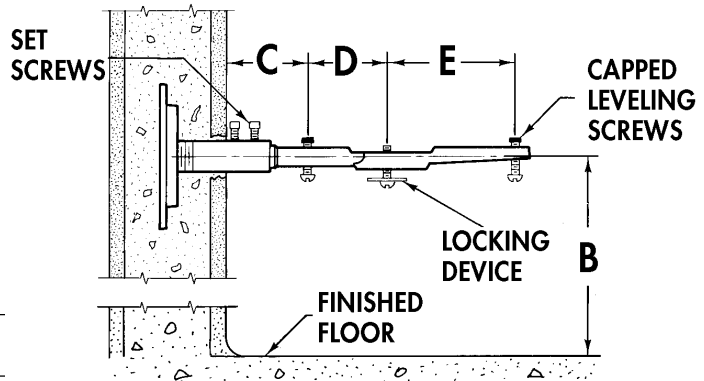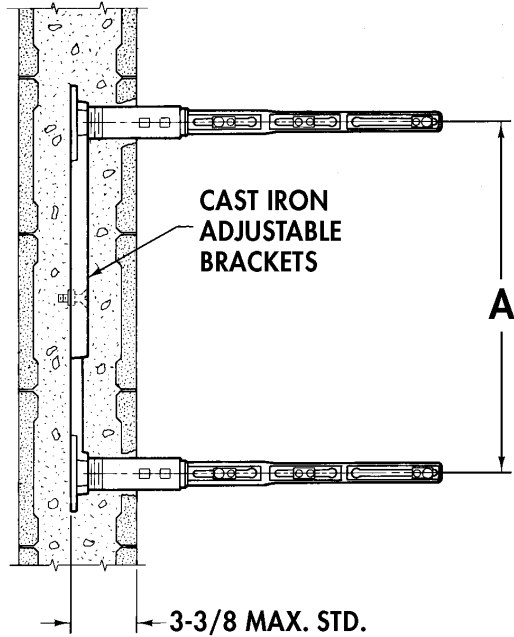

Cat. No.	Type	Wt. Lbs.
<input type="checkbox"/> 572	For Block Walls	18

CONCEALED ARMS: (Pairs, Cast Iron)

Suffix	Description
<input type="checkbox"/> 05	14-3/4" Offset Arm
<input type="checkbox"/> 07	16" In-Line
<input type="checkbox"/> 08	17" In-Line
<input type="checkbox"/> 09	19" In-Line
<input type="checkbox"/> 07-M19	In-Line Eyebolt, Hardware
<input type="checkbox"/> 07-M25-4	16", 4" Rear Lev Screw
<input type="checkbox"/> 08-M25-6	17", 6" Rear Lev Screw
<input type="checkbox"/> 09-M25-4	19", 4" Rear Lev Screw IH-360
<input type="checkbox"/> 09-M25-4	19", 4" Rear Lev Screw

OPTIONS:

Suffix	Description
<input type="checkbox"/> M23	Escutcheon, Chrome-Plated
<input type="checkbox"/> M24	Wheelchair Lav Support

EXPOSED ARMS: (Pairs, A.R.E. Cast Iron)

Suffix	Description
<input type="checkbox"/> 02	14-3/4" Offset Arm
<input type="checkbox"/> 02-M19	16" In-Line
<input type="checkbox"/> 03	17" In-Line
<input type="checkbox"/> KG	Notched Flat
<input type="checkbox"/> NR	Notched Flat

Arm Suffixes: Refer to page 2-8 for details.