


# Shallow Sump Floor Drains

# WADE

**1200TD** Cast iron shallow floor drain with 1/2" plugged primer tap, flange, integral clamping collar, sediment bucket, and loose set ductile iron grate supported by bucket.

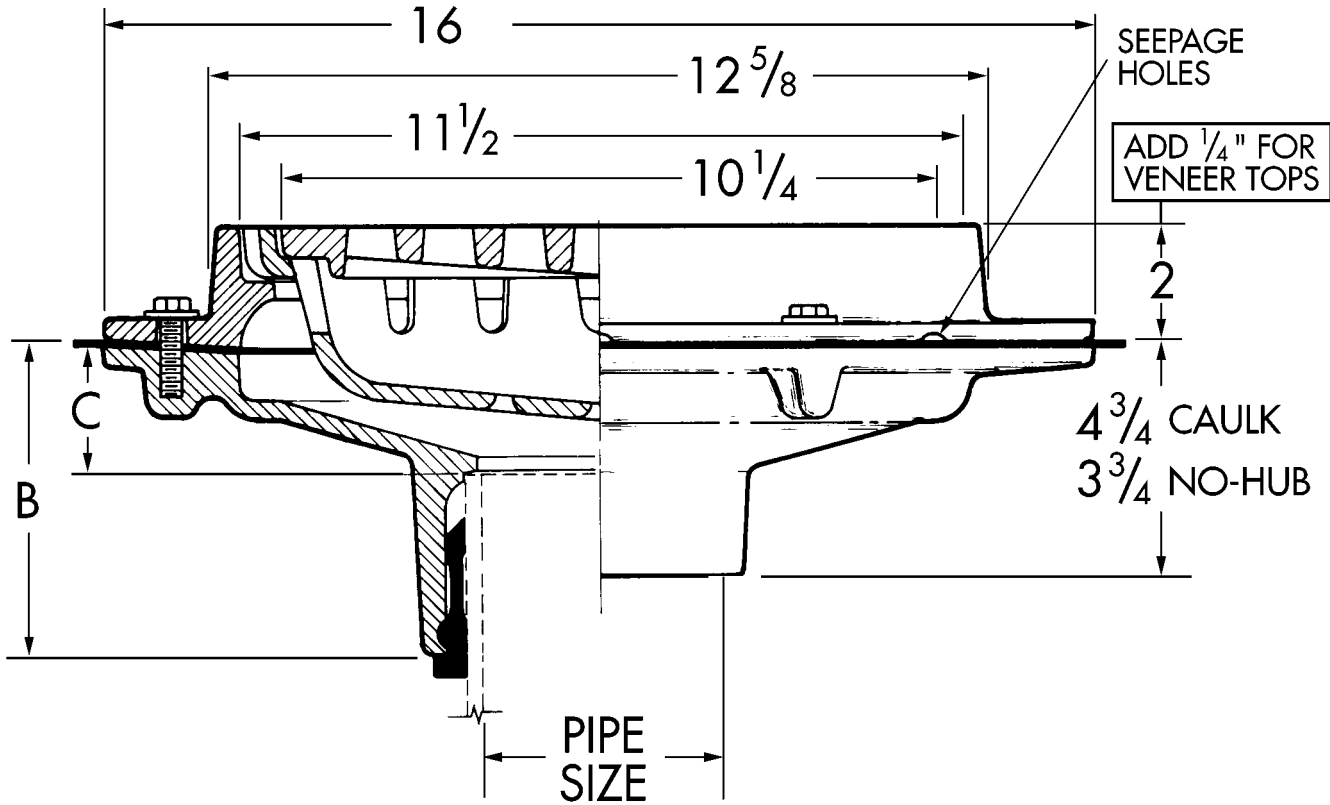

Cat. No.	Pipe Size	B Ty-Seal	C	ANSI* Load Class	Flow Rate (GPM)	Free Area Sq. In.	Wt. Lbs.
<input type="checkbox"/> 1202TD	2	4 3/4	2 1/4	SD	36	39.0	59
<input type="checkbox"/> 1203TD	3	4 3/4	2	SD	68	39.0	59
<input type="checkbox"/> 1204TD	4	5	2	SD	100	39.0	59
<input type="checkbox"/> 1206TD	6	4 3/4	1 3/4	SD	135	39.0	59
<input type="checkbox"/> 1208TD	8	...	...	SD	170	39.0	59
<input type="checkbox"/> 1209TD	10	...	...	SD	175	39.0	59

\*SD = Special Duty (Over 10,000 lbs.)

### OUTLET:

- ( TY) Ty-Seal (2", 3", 4", 6")
- ( NH) No-Hub (3", 4", 6", 8", 10")
- ( IC) Inside Caulk (3", 4", 6")

### OPTIONS

- | Suffix                       | Description                   |
|------------------------------|-------------------------------|
| <input type="checkbox"/> 5   | Vandal Proof (Standard on NB) |
| <input type="checkbox"/> 8   | Secondary Strainer            |
| <input type="checkbox"/> 18  | Solid Cover Package (DI Only) |
| <input type="checkbox"/> 23  | Grate Riser Each 2" High      |
| <input type="checkbox"/> 27  | Sediment Bucket, Aluminum     |
| <input type="checkbox"/> 31  | Backwater Valve               |
| <input type="checkbox"/> 39  | Galvanized Iron Parts         |
| <input type="checkbox"/> 179 | Security Screws               |

(For optional funnels, see page 3-2)