


Medium Sump Floor Drains

WADE

1210 Cast iron medium depth floor drain with 1/2" plugged primer tap, flange, integral clamping collar and ductile iron loose set tractor grate.

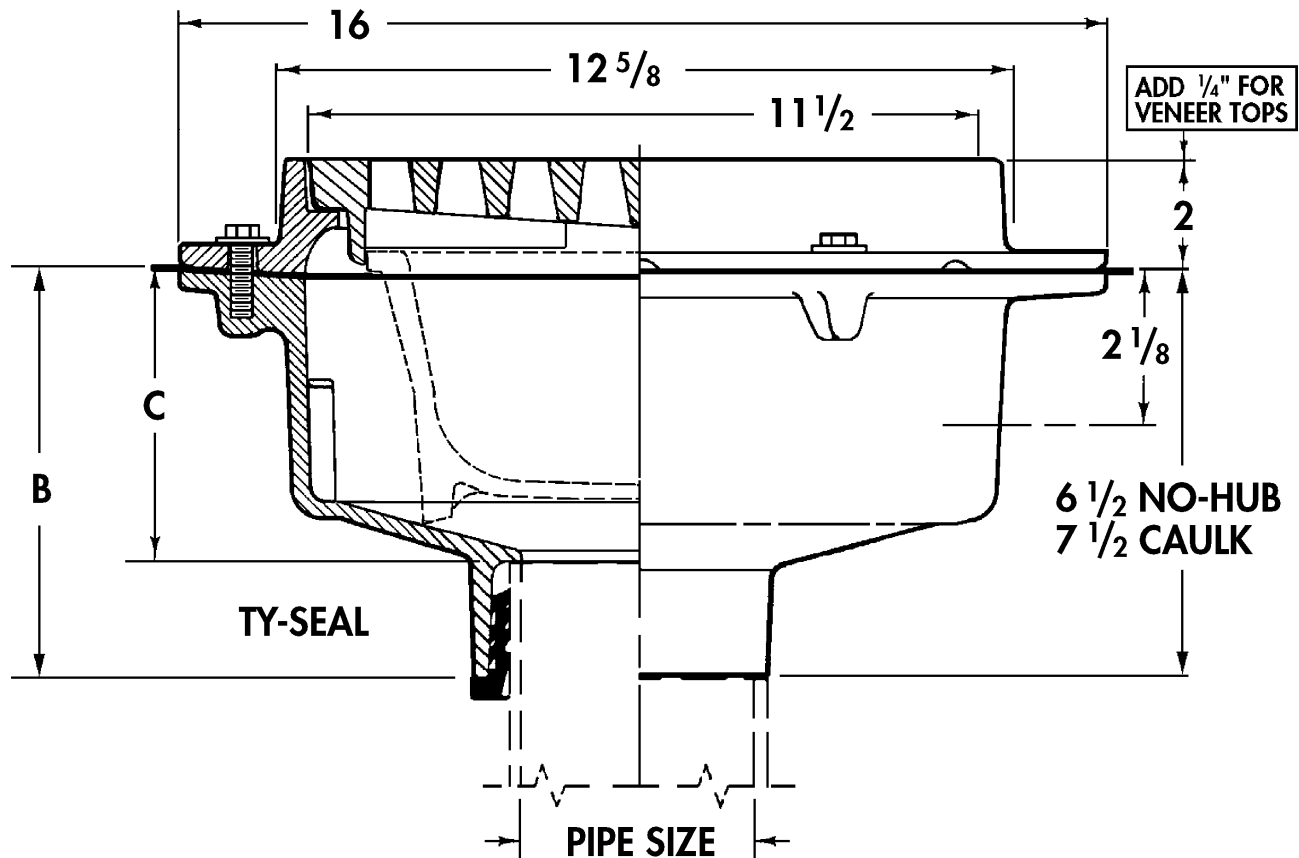

OPTIONS

Suffix	Description
<input type="checkbox"/>	1 Nickel Bronze Veneer Top
<input type="checkbox"/>	5 Vandal Proof (Standard on NB)
<input type="checkbox"/>	8 Secondary Strainer
<input type="checkbox"/>	18 Solid Cover Package
<input type="checkbox"/>	23 Grate Riser Each 2" High
<input type="checkbox"/>	27 Sediment Bucket, Aluminum
<input type="checkbox"/>	31 Backwater Valve
<input type="checkbox"/>	39 Galvanized Iron Parts
<input type="checkbox"/>	179 Security Screws

For Optional Funnel, see page 3-2

Cat. No.	Pipe Size	B Ty-Seal	C	ANSI* Load Class	Flow Rate (GPM)	Free Area (Sq. In.)	Wt. (Lbs.)
<input type="checkbox"/> 1212	2	8	5 1/2	SD	38	39.0	66
<input type="checkbox"/> 1213	3	8	5 1/4	SD	71	39.0	66
<input type="checkbox"/> 1214	4	8 1/4	5 1/4	SD	104	39.0	66
<input type="checkbox"/> 1216	6	8	5	SD	150	39.0	66
<input type="checkbox"/> 1218	8	SD	195	39.0	66

*SD = Special Duty (Over 10,000 lbs.)

OUTLET:

- (TY) Ty-Seal (2", 3", 4", 6")
- (NH) No-Hub (3", 4", 6", 8")
- (IC) Inside Caulk (3", 4", 6")