


Floor Drains



1310 Cast iron floor drain with flange, plugged 1/2" primer tap, integral clamping collar, seepage openings and ductile iron loose set tractor grate.

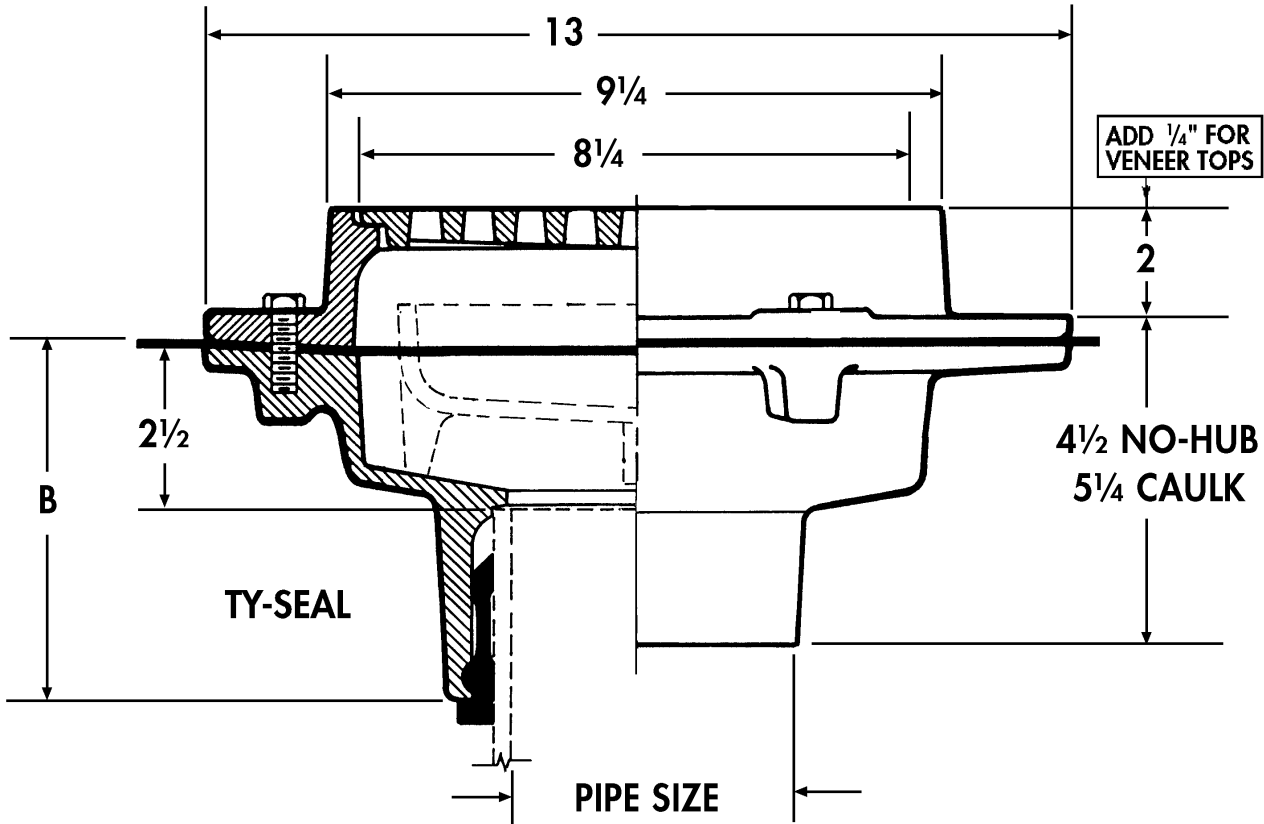

Cat. No.	Pipe Size	ANSI* Load Class	B Ty-Seal	Flow Rate (GPM)	Free Area Sq. In.	Wt. Lbs.
<input type="checkbox"/> 1312	2	XH	5	30	18.3	35
<input type="checkbox"/> 1313	3	XH	5 1/4	50	18.3	35
<input type="checkbox"/> 1314	4	XH	5 1/2	80	18.3	35

*XH = Extra Heavy Duty (7,500 to 10,000 lbs.)

OUTLET:

- (TY) Ty-Seal
- (NH) No-Hub
- (IC) Inside Caulk

OPTIONS

- | Suffix | Description |
|------------------------------|-------------------------------|
| <input type="checkbox"/> 1 | Nickel Bronze Veneer Top |
| <input type="checkbox"/> 4 | Square Frame (NB Only) |
| <input type="checkbox"/> 5 | Vandal Proof (Standard on NB) |
| <input type="checkbox"/> 7 | Dome Grate (DI Only) |
| <input type="checkbox"/> 8 | Secondary Strainer |
| <input type="checkbox"/> 18 | Solid Cover Package |
| <input type="checkbox"/> 23 | Grate Riser Each 1 1/2" High |
| <input type="checkbox"/> 27 | Sediment Bucket, Aluminum |
| <input type="checkbox"/> 31 | Backwater Valve |
| <input type="checkbox"/> 39 | Galvanized Iron Parts |
| <input type="checkbox"/> 179 | Security Screws |

(For optional funnels, see page 3-2)