


Floor Drains

WADE

1310TD Cast iron floor drain with flange, plugged 1/2" primer tap, integral clamping collar, seepage openings, sediment bucket and ductile iron grate supported by bucket.

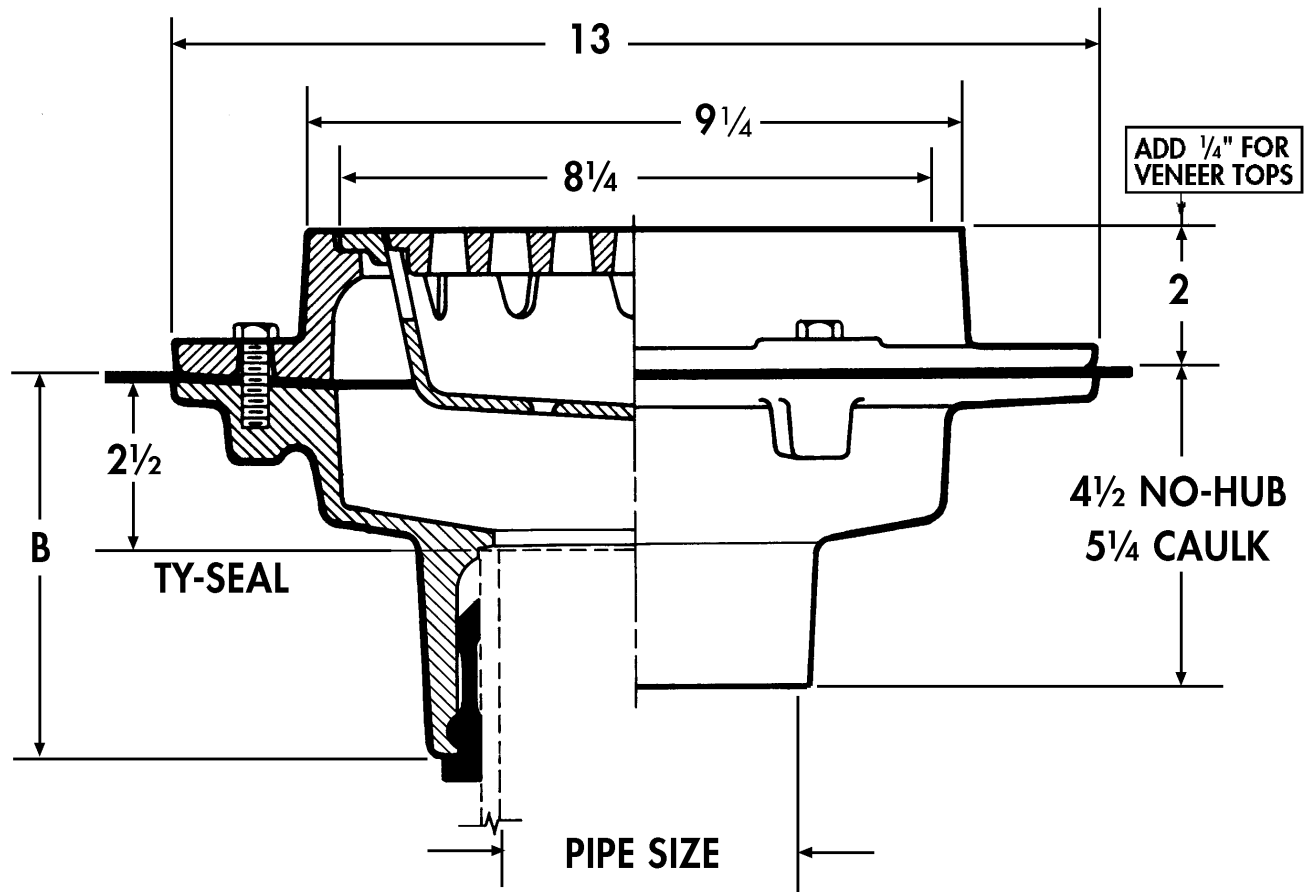

OPTIONS

Cat. No.	Pipe Size	ANSI* Load Class	B Ty-Seal	Flow Rate (GPM)	Free Area Sq. In.	Wt. Lbs.
1312TD	2	XH	5	25	9.1	39
1313TD	3	XH	5 1/4	45	9.1	39
1314TD	4	XH	5 1/2	75	9.1	39

*XH = Extra Heavy Duty (7,500 to 10,000 lbs.)

Suffix	Description
1	Nickel Bronze Veneer Top
4	Square Frame (NB Only)
5	Vandal Proof (Standard on NB)
23	Grate Riser Each 1 1/2" High
31	Backwater Valve
39	Galvanized Iron Parts
179	Security Screws

(For optional funnels, see page 3-2)

OUTLET:

- (TY) Ty-Seal
- (NH) No-Hub
- (IC) Inside Caulk