
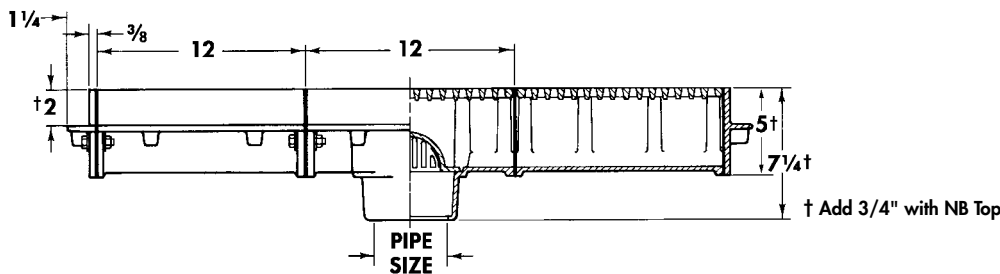


Trench Drains


WADE

2950 Cast iron multiple section trench drain with inside caulk outlet, flange, medium duty ductile iron loose set grates and secondary dome strainer.


Note: Order outlet units by pipe size; order extension units separately to meet trench drain length requirement. Extensions fit any size outlet. Outlets shipped with two end pieces installed, extensions shipped separately.

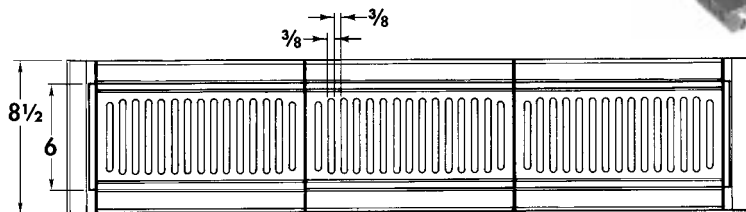

2950, 1 Ft, Outlet w/Two 2950, 1Ft, Extensions

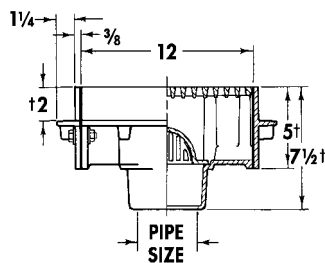

2950, 1 Ft, Outlet



2950, 1 Ft, Extension



Cat No.	Pipe Size	ANSI* Load Class	Top Size	Free Area Sq. In.	Wt. Lbs.
<input type="checkbox"/> 2950, 1 Ft., Outlet	3	MD	6 x 12 ³ / ₄	22.9	29
<input type="checkbox"/> 2950, 1 Ft., Outlet	4	MD	6 x 12 ³/₄	22.9	29
<input type="checkbox"/> 2950, 1Ft., Extension	Fits all sizes	MD	6 x 12	22.9	29

*MD= Medium Duty (2,000 to 4,999 lbs)

OUTLET

Inside Caulk Only

OPTIONS

Suffix	Description
<input type="checkbox"/> 1	Nickel Bronze Top†
<input type="checkbox"/> 5	Vandal Proof Screws (Standard on NB)
<input type="checkbox"/> 39	Galvanized Iron Parts
<input type="checkbox"/> 179	Security Screws

† Light Duty (Under 2,000lbs.)