


Floor Drains with Adjustable Strainers

WADE

1100H Cast iron floor drain with flange, integral clamping collar, seepage openings, 1/2" plugged primer tap, and adjustable _____ x _____ " rectangular nickel bronze strainer with vandal proof screws.

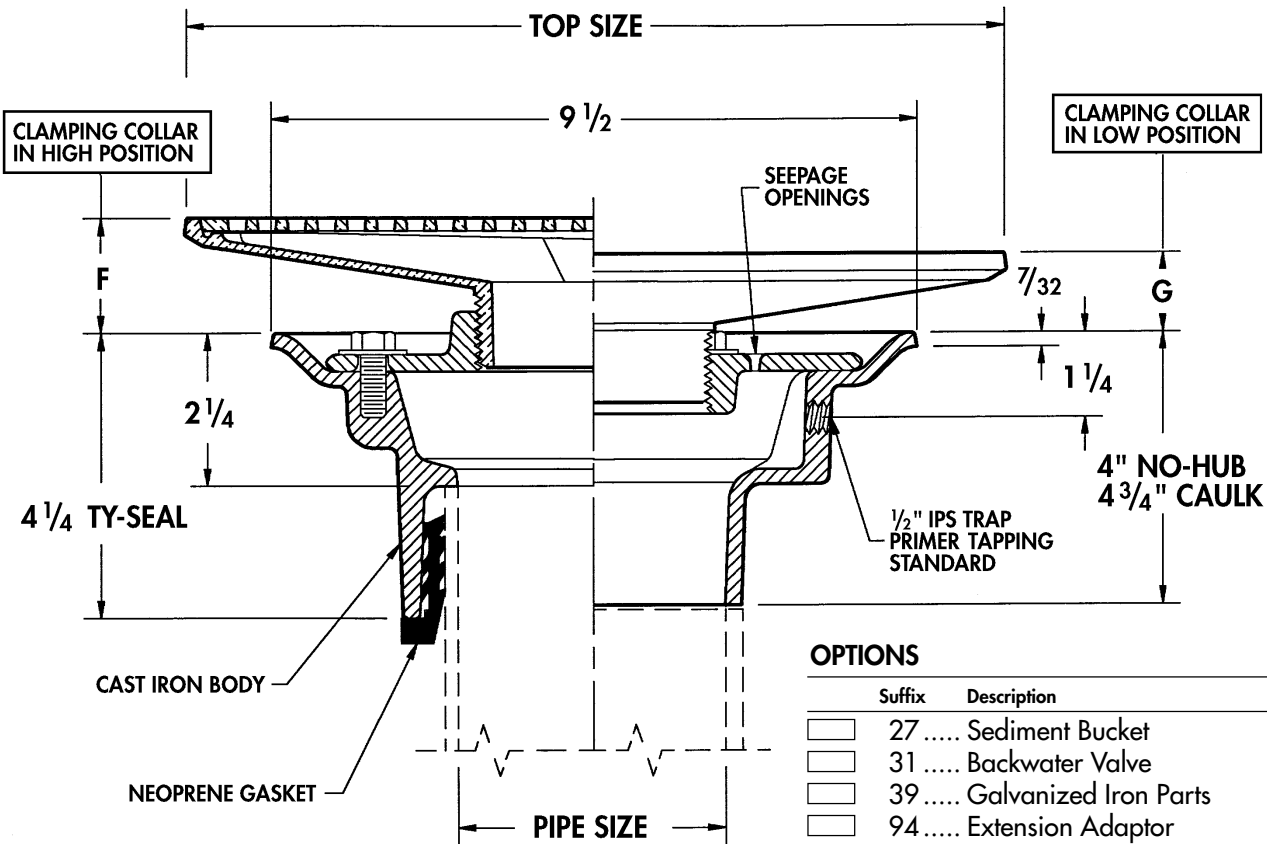

OPTIONS

Suffix	Description
<input type="checkbox"/> 27	Sediment Bucket
<input type="checkbox"/> 31	Backwater Valve
<input type="checkbox"/> 39	Galvanized Iron Parts
<input type="checkbox"/> 94	Extension Adaptor
<input type="checkbox"/> 94	Extension Adaptor, Galvanized
<input type="checkbox"/> 179	Security Screws
<input type="checkbox"/> EF4	4" Dia. Funnel
<input type="checkbox"/> EF6	6" Dia. Funnel
<input type="checkbox"/> EG6	2 1/2 x 6 1/8 Elongated Funnel (NB Only)
<input type="checkbox"/> EG8	3 1/2 x 8 1/4" Elongated Funnel

Cat. No.	Pipe Size	Top Size	ANSI* Load Class	Flow Rate (GPM)	Free Area Sq. In.	Wt. Lbs.	F		G	
							Min.	Max.	Min.	Max.
<input type="checkbox"/> 1102H8	2	4x8	L.D.	28	9.0	14	1 5/8	2 1/4	1 1/16	1 9/16
<input type="checkbox"/> 1102H12	2	4x12	L.D.	32	13.4	19	1 9/16	2 5/16	1 15/16	1 11/16
<input type="checkbox"/> 1103H8	3	4x8	L.D.	35	9.0	15	1 5/8	2 1/4	1 15/16	1 9/16
<input type="checkbox"/> 1103H12	3	4x12	L.D.	39	13.4	20	1 9/16	2 5/16	1 15/16	1 11/16
<input type="checkbox"/> 1103H17	3	5x17	L.D.	44	31.8	24	2 1/4	3 1/8	1 5/8	2 1/2
<input type="checkbox"/> 1104H12	4	4x12	L.D.	54	13.4	20	1 9/16	2 5/16	1 15/16	1 11/16
<input type="checkbox"/> 1104H17	4	5x17	L.D.	67	31.8	24	2 1/4	3 1/8	1 5/8	2 1/2

For optional strainers see pages 3-12, 3-15.

*L.D.= Light Duty (Under 2000 lbs.)

OUTLET:

- (TY) Ty-Seal
- (NH) No-Hub
- (IC) Inside Caulk