


# Large Capacity Oil Interceptors

# WADE

**5400** Fabricated steel oil interceptor with anti-skid gasketed cover, removable baffles, acid resisting coating, threaded inlet and outlet.

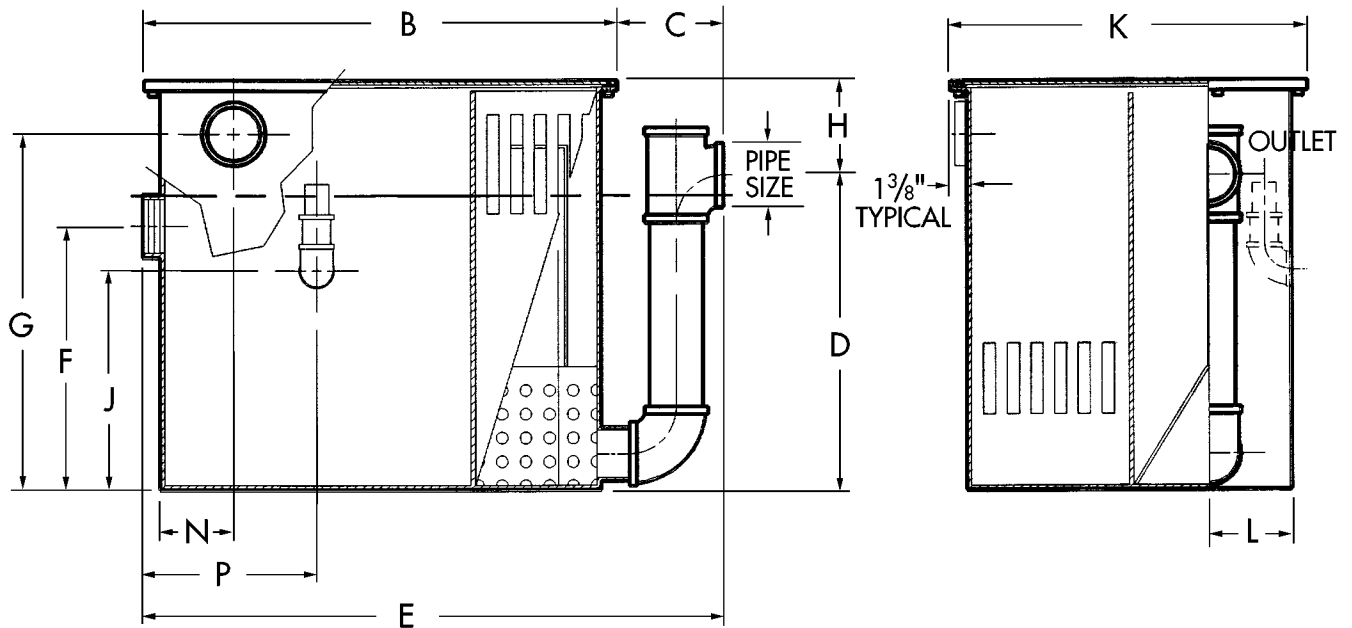

Cat. No.	Pipe Size	Vent Size	Draw Size	B	C	D	E	F	G	H Min	J	K	L	P	GPM Gal.	# CVRS
5400-025	2	3	1 1/2	24	9	25 1/2	33	22 1/2	26	4 1/2	19	18	3 3/8	7	25	1
<b>5400-035</b>	<b>3</b>	<b>3</b>	<b>1 1/2</b>	<b>30</b>	<b>11 7/8</b>	<b>26</b>	<b>41 7/8</b>	<b>22 1/2</b>	<b>27</b>	<b>5</b>	<b>19</b>	<b>20</b>	<b>3 3/8</b>	<b>9</b>	<b>35</b>	<b>1</b>
5400-050	3	3	1 1/2	36	11 7/8	26	47 7/8	22 1/2	28	6	19	25	5 1/8	9	50	1
<b>5400-075</b>	<b>4</b>	<b>4</b>	<b>2</b>	<b>40</b>	<b>13 3/8</b>	<b>26 1/2</b>	<b>53 3/8</b>	<b>22 1/4</b>	<b>30</b>	<b>9 1/2</b>	<b>18 1/2</b>	<b>30</b>	<b>6 3/4</b>	<b>16</b>	<b>75</b>	<b>1</b>
5400-100	4	4	2	49 1/2	13 3/8	26 1/2	62 7/8	22 1/4	30	9 1/2	17 3/4	36	6 1/2	24	100	2
<b>5400-150</b>	<b>4</b>	<b>4</b>	<b>2</b>	<b>57</b>	<b>13 3/8</b>	<b>30</b>	<b>70 3/8</b>	<b>22 3/4</b>	<b>35</b>	<b>14</b>	<b>22</b>	<b>36</b>	<b>8</b>	<b>14</b>	<b>150</b>	<b>2</b>
5400-200	4	4	2	64 1/4	13 3/8	30 1/2	77 5/8	26	38	17 1/2	22 1/4	40	8 1/4	32	200	3
<b>5400-250</b>	<b>4</b>	<b>4</b>	<b>3</b>	<b>64 1/4</b>	<b>13 3/8</b>	<b>35 1/2</b>	<b>77 5/8</b>	<b>31</b>	<b>42</b>	<b>15 1/2</b>	<b>24</b>	<b>45</b>	<b>9 1/4</b>	<b>32</b>	<b>250</b>	<b>3</b>
5400-300	6*	4	3	70 1/4	18 3/8	36 1/2	88 5/8	30	43	15 1/2	24	45	9 1/4	38	300	3
<b>5400-350</b>	<b>6*</b>	<b>4</b>	<b>3</b>	<b>76 1/2</b>	<b>18 3/8</b>	<b>43 1/2</b>	<b>94 5/8</b>	<b>37</b>	<b>48</b>	<b>16 1/2</b>	<b>31</b>	<b>45</b>	<b>10 1/8</b>	<b>44</b>	<b>350</b>	<b>3</b>
5400-400	6*	4	3	83	18 3/8	43	101 3/8	36 3/4	49	17	31	45	10 1/4	38	400	3
<b>5400-450</b>	<b>6*</b>	<b>4</b>	<b>3</b>	<b>94 1/4</b>	<b>18 3/8</b>	<b>43</b>	<b>112 5/8</b>	<b>36 3/4</b>	<b>49</b>	<b>17</b>	<b>31</b>	<b>45</b>	<b>10 1/4</b>	<b>38</b>	<b>450</b>	<b>3</b>
5400-500	6*	4	3	94 1/4	18 3/8	46	112 5/8	39 3/4	52	20	34	45	10 1/4	59	500	3

## OPTIONS

Suffix	Description
26	Anchor Flange & Clamp Device
HD	Heavy Duty Cover

A minimum of 3" must be added to standard H dimension when ordering anchor flange.  
Flanged connection is standard on 6" outlet.