


# Grease Interceptors



## 5100XT (Extended)

Fabricated steel grease interceptor with white acid resisting coating, removable baffles, threaded inlet and outlet, external flow control fitting, gasketed scoriated cover and threaded inlet and outlet.

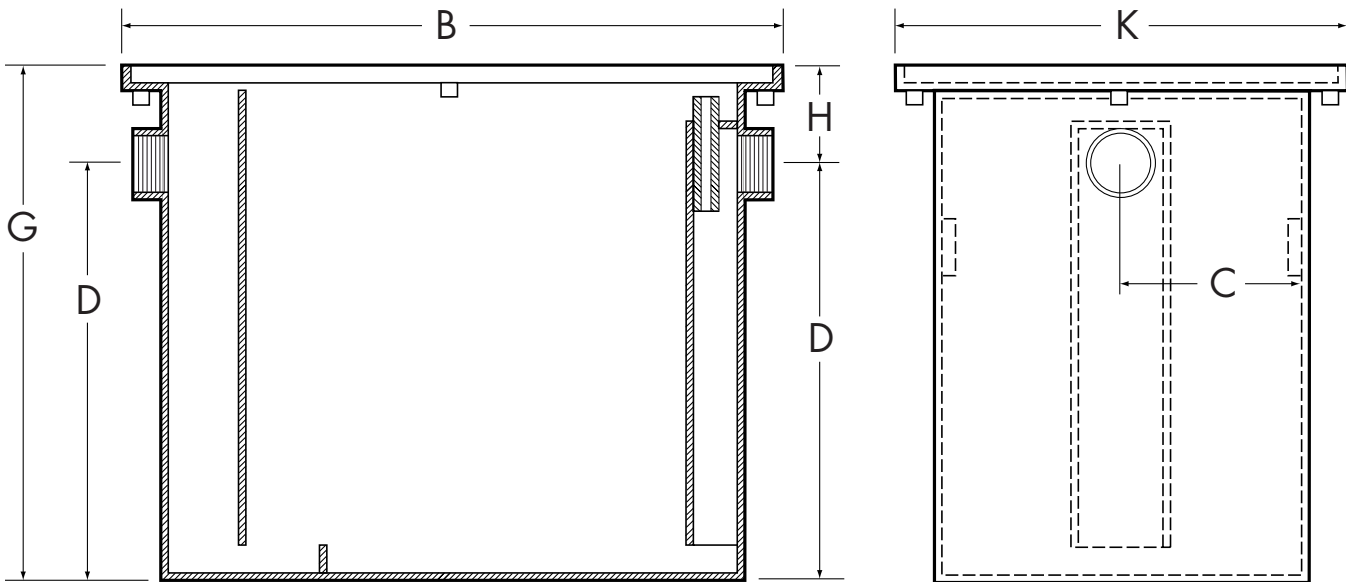

Cat. No.	Pipe Size	B	C	D	G	Min. H	K	GPM Max	Grease Capacity	Ship Wt.
<input type="checkbox"/> 5110XT	2	20	6 3/8	9 1/2	13	3 1/2	15	10	20	55
<input type="checkbox"/> 5115XT	2	25	7 3/8	9 1/2	13	3 1/2	17	15	30	71
<input type="checkbox"/> 5120XT	3	27	8	9 1/2	13	3 1/2	18 3/4	20	40	80
<input type="checkbox"/> 5125XT	3	26	8 5/8	13 1/2	18	4 1/2	20	25	50	103
<input type="checkbox"/> 5135XT	4	28 1/2	8 5/8	17 1/2	22	4 1/2	20	35	70	120
<input type="checkbox"/> 5150XT	4	30	10 5/8	17 1/2	22	4 1/2	24	50	100	148

All Sizes PDI Approved



### OPTIONS

Suffix	Description
<input type="checkbox"/> 26	Flange & Clamp Device

A minimum of 3" must be added to standard H dimension when ordering anchor flange.

**Must specify exact H dimension when entering order** \_\_\_\_\_