


3001 19" Diameter, Large Area Roof Drain (Replaces 3000-L, 3000-LB)

| | |
|------------|--|
| Project | |
| Engineer | |
| Mechanical | |

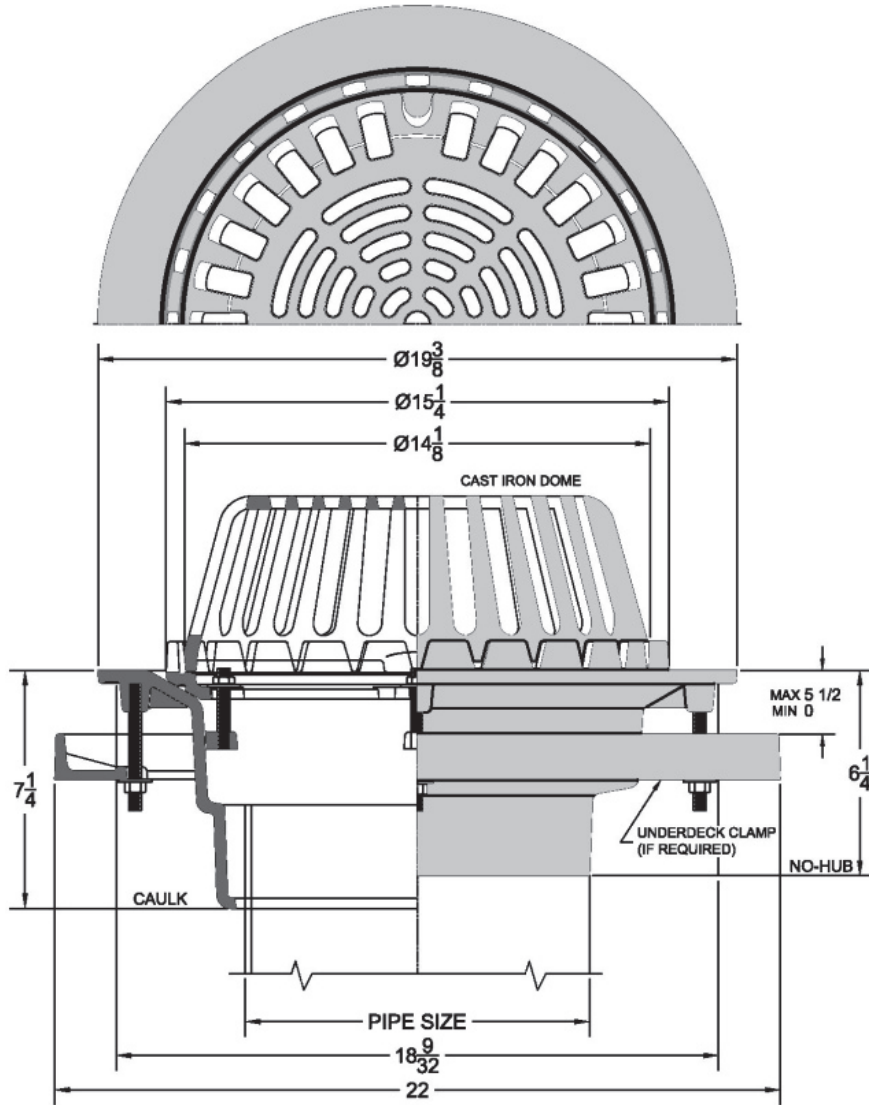

Dome Free Area
122.0 Sq.In.

Regularly Furnished: Cast iron roof drain with flange, flashing ring, gravel stop, & locking dome.

| 3001 | -42 Cast Iron Body with Cast Iron Dome | -46 Cast Iron Body with Aluminum Dome |
|------|---|--|
| • | | |

| Outlet Variations | | |
|-------------------|---------------|---|
| Type | Designation | • |
| Inside Caulk | 8IC,10IC | |
| No-Hub | 8NH,10NH,12NH | |

| Optional Extensions | | |
|---------------------|------------------------------------|----------|
| Suffix | Description | • |
| -AE | Adjustable Extension* | Painted |
| | | -39 Galv |
| -DF | Fixed Extension (1",2",3" or 4") * | Painted |
| | | -39 Galv |
| -EB | Adjustable Drain Extension Pan* | |

| Suffix Options | | |
|----------------|--|---|
| Suffix | Description | • |
| -ARC | Acid Resistant Coating | |
| -D | 2" External Overflow Dam* | |
| -DFS | Perforated Stainless Steel Extension (1"-4") * | |
| | For Each Additional 1" (Add / In.) | |
| -DP | Perforated Stainless Steel Gravel Stop (4") * | |
| -SD | Adjustable Internal Overflow Dam* | |
| -SO | Side Outlet (3TY,4TY,6TY) | |
| -VP | Vandal Proof Top Assembly | |
| -39 | Galvanized Cast Iron | |
| -49 | Bronze Mesh Over Dome | |
| -50 | Stainless Steel Mesh Over Dome | |
| -52 | Sump Receiver* | |
| -53 | Under-Deck Clamp* | |
| -189 | Bearing Pan w/ Clips & Securing Hardware* | |

*Dimensions vary from illustration